


74.95 EUR
incl. 19% VAT, plus [shipping](#)

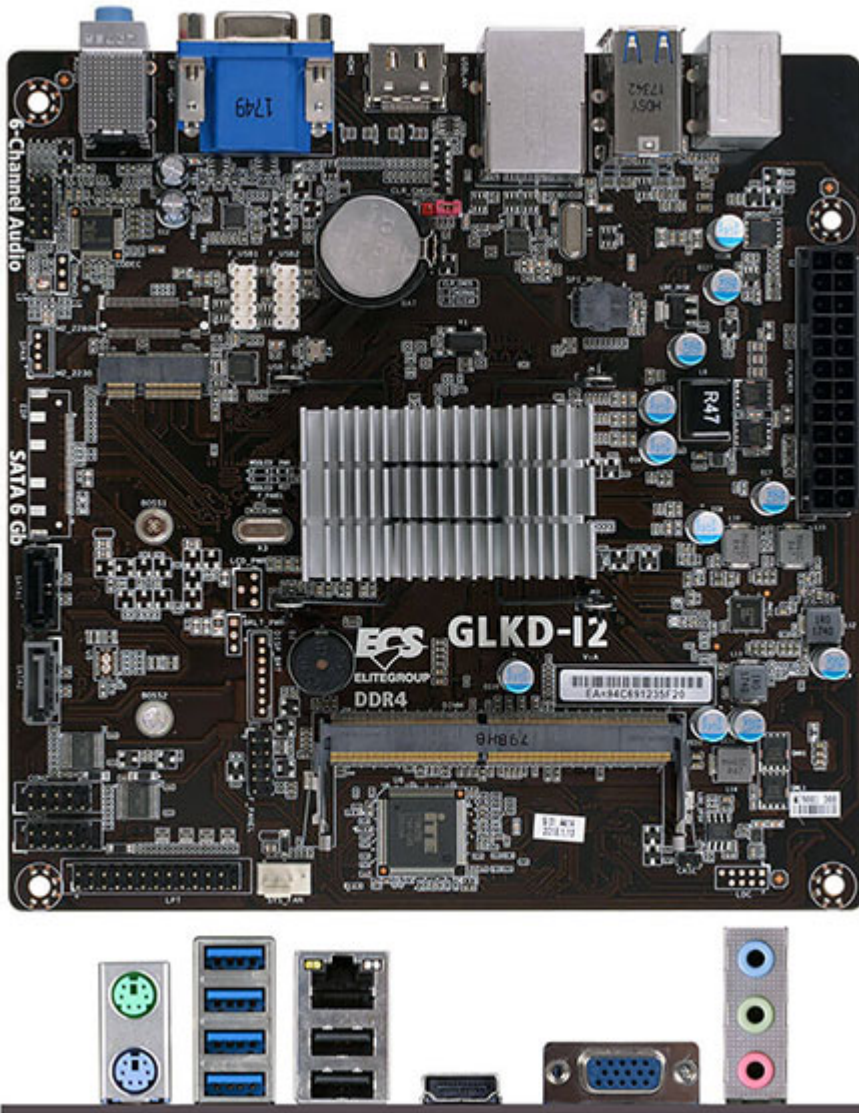

- Windows 10 Workable support
- ECS Durathon Technology ensure the stability, reliability and performance of system.
- ECS MIB III - A friendly interface for overclocking
- ECS Intelligent EZ Utility : eBLU, eDLU

Supports Intel® CNVi

| | |
|-----------------|--|
| CPU | Onboard Intel® Gemini Lake processors 1 Phase Thermal Design Power 100% Solid capacitor design |
| GRAPHICS | Supports DirectX® 12 Supports HDMI 1.4b & Premium Audio Supports DP 1.2 (only with mainboard version with DP port) |

| | |
|-----------------------|--|
| MEMORY | Single-channel DDR4 Memory architecture Supports DDR4 2400 non-ECC, Un-buffered SDRAM Memory 1 X DDR4 SO-DIMM socket |
| EXPANSION SLOT | Support up to 8 GB 1 X M.2 slot for WiFi/BT PCIe Gen 2 |
| Storage | Supports Intel® CNVi Support by Gemini Lake Express Chipset 2 X Serial ATAIII 6Gb/s |
| Audio | 6-Channel HD audio CODEC Realtek ALC662 Realtek ALC662 6-channel High Definition audio CODEC Meets performance requirements for Microsoft WLP 3.08 Vista premium and mobile PCs Six channel DAC supports 16/20/24-bit PCM format for 5.1 channel audio solution Emulation of 26 sound environments to enhance gaming experience Voice Cancellation and Key Shifting in Karaoke mode Compatible with Direct Sound 3D™, A3D™, I3DL2 |
| LAN | Realtek 8111H Gigabit Fast Ethernet Controller |
| USB | 4 X USB3.1 Gen1 port(s) up to 5Gb/s (either rear I/O or front header) 6 X USB2.0 port(s) Up to 480 Mb/s [Back Panel 2 port(s), Onboard 4 port(s)] 1 X PS/2 Keyboard & PS/2 mouse connectors |
| REAR PANEL I/O | 1 X Audio port (Line Out/Line In/Mic In) 1 X RJ-45 port 1 X HDMI port(s) 1 X D-Sub (VGA) port(s) 1 X Display port(optional instead of D-SUB (VGA)) |

| | |
|---------------------------------|---|
| CONNECTORS & HEADERS | 1 X 24-pin ATX Power Supply connector 1 X 4-pin SYS_FAN connector 1 X Front Panel MIC/Speaker out header 1 X Front Panel switch/LED header 2 X USB 2.0 header 1 X CLR_CMOS header 2 X Serial port header (COM) 1 X Parallel port header (LPT) 1 X eDP header (optional) |
| SYSTEM BIOS | AMI BIOS with 128 MB SPI Flash ROM Supports M.I.B III Utility Dual Display Support GUI UEFI BIOS Multi-Language BIOS |
| FORM FACTOR | Mini ITX Form Factor 170*170 |
| OS Support | Windows 10 64-bit Windows 10 32-bit |
| Certifications | CE/FCC Certification WHQL Certification |
| Bundled Software | ECS Intelligent EZ Utility : eBLU, eDLU |