


289.00 EUR
incl. 19% VAT, plus [shipping](#)

- LGA1151 Socket !
- H310 Chipset !
- MicroATX !

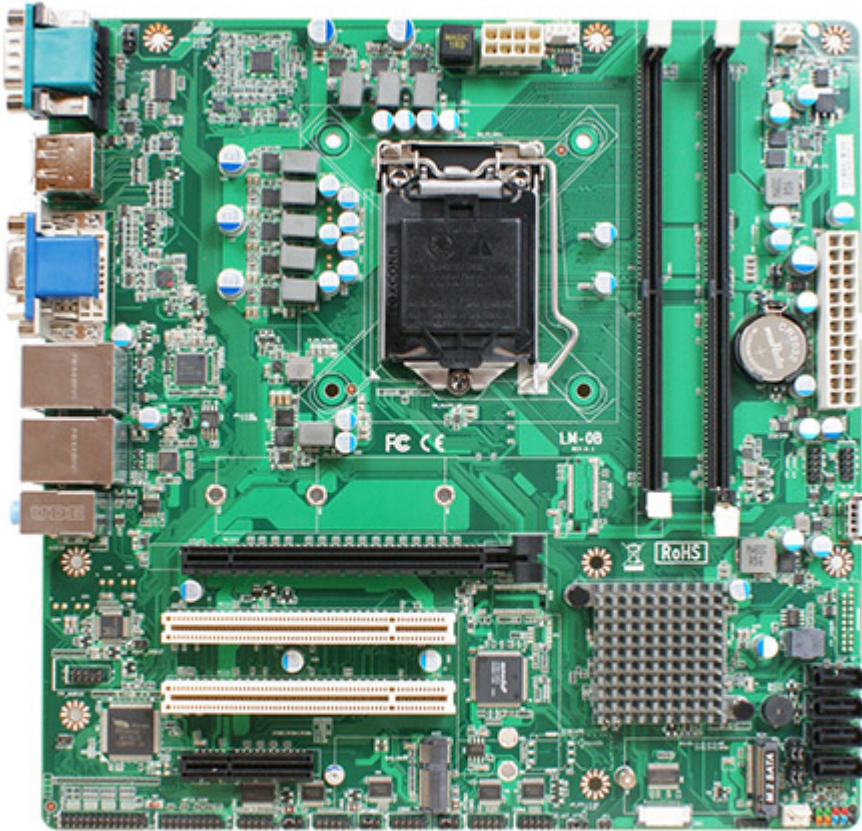

- Intel® LGA1151 Socket support 9/8th Gen. Core Processor (Max 95W)
- Intel® Coffee Lake-S H310 Chipset
- 2* DDR4 2666/2400/2133MHz SO-DIMM up to 64GB
- Realtek HD Audio (LM0B-00 model)
- 1* Intel® I219-V GbE, 1* Intel® i211AT GbE
- 4* SATAIII (6Gb/s), 1* M.2 (M-key), 1* M.2 (E-key) support CNVi, 1* PCI-E x16, 1* PCI-Ex4, 2* PCI
- Support VGA / DVI-D / HDMI / DP dual display
- 2* RS232/422/485 (COM1/2), 4* RS232, 4* USB3.1, 5* USB2.0
- ATX Power Input
- Micro ATX Form Factor (244 *244 mm)

Model	– JLM0B-00 – JLM0B-0A (Without Audio)
Form Factor	– Micro ATX (244 * 244mm)
Processor System	– Intel LGA1151 Socket support 9/8th Gen. Core Processor (Max 95W) – Intel H310s chipset – AMI 128Mb Flash ROM BIOS

Expansion Slot	<ul style="list-style-type: none"> - 2* PCI - 1* M.2 M-key (2242, Co-lay SATA4) - 1* M.2 E-key (2230, support CNVi) - 4* SATA (SATA4 Co-lay M.2) - 1* PCIe x16, 1* PCIe x4
Memory	- 2* DDR4 2666/2400/2133MHz LONG DIMM up to 64GB
Graphics	<ul style="list-style-type: none"> - Intel® HD Graphics, shared memory - 1* VGA (Max Resolution: 1920x1080@60Hz) - 1* HDMI 1.4 (Max Resolution: 4096x2304@24Hz) - 1* DVI-D (Max Resolution: 4096x2304@24Hz) - 1* DP (Max Resolution: 4096x2304@60Hz) - Support Dual Displays
Ethernet	<ul style="list-style-type: none"> - 1* Intel I219-V GbE - 1* Intel i211AT GbE
Audio	- Realtek HD audio (JLM0B-00 only)
SATA	- 4* SATAIII (6.0Gb/s)
Rear I/O	<ul style="list-style-type: none"> - 1* VGA - 1* DVI-D - 1* HDMI - 1* DP - 2* RJ45 - 4* USB3.1 - 1* RS232/422/485 (support 5/12V) - 1* PS/2 - Line-in, Line-out, MIC
Internal I/O	<ul style="list-style-type: none"> - 4* USB 2.0, 1* USB2.0 (Erect) - 5* COM (COM2: RS232/422/485, COM3-6: RS232, COM1-4: support 5/12V TTL) - 4* SATAIII (6.0Gb/s, SATA4 Co-lay M.2 M-key) - 1* M.2 M-key, 1* M.2 E-key - 1* Parallel - 1* GPIO (16 bit) - 1* Chassis intrusion - 1* Audio Header - 1* SMBUS/I2C - 1* AT mode - 1* TPM2.0 (option)
Watchdog Timer	<ul style="list-style-type: none"> - From Super I/O to drag RESETCON# - 256 segments (10sec ~ 255min)
Power	<ul style="list-style-type: none"> ATX PWR (8+24 pin), AT/ATX Supported - AT: Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Compliance	- CE, FCC, RoHS, REACH
Temperature	<ul style="list-style-type: none"> - Operating: 0°C ~ 60°C - Storage: -20°C ~ 85°C - Humidity: 10% ~ 90% RH @40°C (non-condensing)
OS Support	- Windows 10, Linux