


79.95 EUR  
incl. 19% VAT, plus [shipping](#)

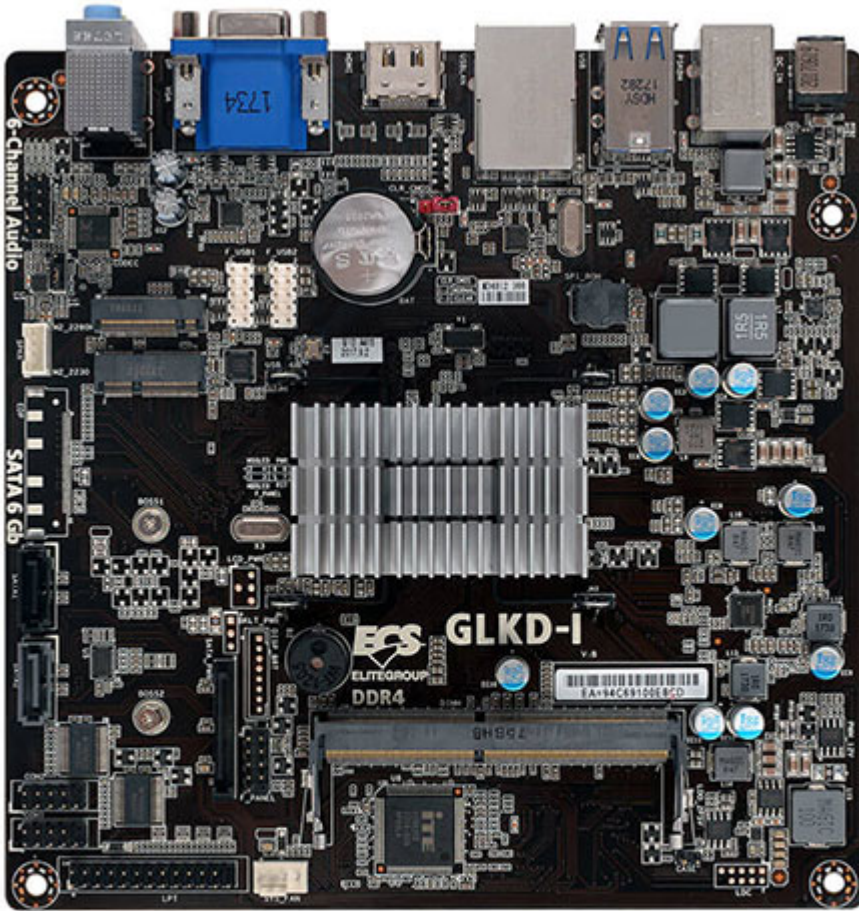

- Windows 10 Workable support
- ECS Durathon Technology ensure the stability, reliability and performance of system.
- ECS MIB III - A friendly interface for overclocking
- ECS Intelligent EZ Utility : eBLU, eDLU

Supports Intel® CNVi

#### CPU

Onboard Intel® Gemini  
Lake processors  
1 Phase Thermal Design  
Power

#### GRAPHICS

100% Solid capacitor  
design  
Supports DirectX® 12  
Supports HDMI 1.4b &  
Premium Audio  
Supports DP 1.2 (only with  
mainboard version with DP  
port)

<b>MEMORY</b>	Single-channel DDR4 Memory architecture Supports DDR4 2400 non-ECC, Un-buffered SDRAM Memory 1 X DDR4 SO-DIMM socket Support up to 8 GB
<b>EXPANSION SLOT</b>	1 X M.2 slot for WiFi/BT PCIe Gen 2 1 X M.2 slot for SSD SATA SSD Support Supports Intel® CNVi
<b>Storage</b>	Support by Gemini Lake Express Chipset 2 X Serial ATA III 6Gb/s
<b>Audio</b>	6-Channel HD audio CODEC Realtek ALC662 Realtek ALC662 6-channel High Definition audio CODEC Meets performance requirements for Microsoft WLP 3.08 Vista premium and mobile PCs Six channel DAC supports 16/20/24-bit PCM format for 5.1 channel audio solution Emulation of 26 sound environments to enhance gaming experience Voice Cancellation and Key Shifting in Karaoke mode Compatible with Direct Sound 3D™, A3D™, I3DL2
<b>LAN</b>	Realtek 8111H Gigabit Fast Ethernet Controller
<b>USB</b>	4 X USB3.1 Gen1 port(s) up to 5Gb/s (either rear I/O or front header) 6 X USB2.0 port(s) Up to 480 Mb/s [Back Panel 2 port(s), Onboard 4 port(s)] 1 X PS/2 Keyboard & PS/2 mouse connectors
<b>REAR PANEL I/O</b>	1 X Audio port (Line Out/Line In/Mic In) 1 X RJ-45 port 1 X HDMI port(s) 1 X D-Sub (VGA) port(s) 1 X Display port (optional instead of D-SUB (VGA)) 1 X DC-in 19V Connector

<b>CONNECTORS &amp; HEADERS</b>	1 X 4-pin SYS_FAN connector 1 X Front Panel MIC/Speaker out header 1 X Front Panel switch/LED header 2 X USB 2.0 header 1 X CLR_CMOS header 2 X Serial port header (COM) 1 X Parallel port header (LPT) 1 X eDP header (optional)
<b>SYSTEM BIOS</b>	AMI BIOS with 128 MB SPI Flash ROM Supports M.I.B III Utility Dual Display Support GUI UEFI BIOS Multi-Language BIOS
<b>FORM FACTOR</b>	Mini ITX Form Factor 170*170
<b>OS Support</b>	Windows 10 64-bit Windows 10 32-bit
<b>Certifications</b>	CE/FCC Certification WHQL Certification
<b>Bundled Software</b>	ECS Intelligent EZ Utility : eBLU, eDLU